

PLUG & PLAY®

AVK Push-fit couplings for PE-pipes

A new coupling for PE, class SDR 11,17 en 17,6 PN 16 with a double sealing ring and a specially designed grip ring. Simple, fast and reliable with Plug & Play, avoids welding of PE pipes and the use of mechanical couplings


Features:

- For PE pipes
- Fast, simple and reliable
- Avoids welding and tightening
- Available from 20 mm till 315 mm



DW-8616CQ0190

ÖVGW Reg. Nr. W 1.678

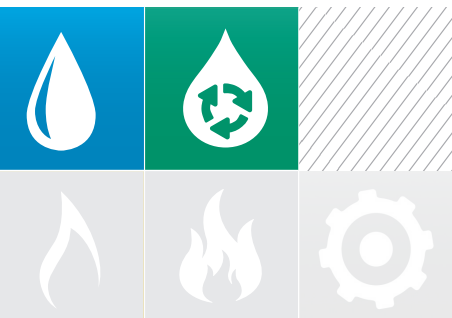

EXPECT SUSTAINABLE
SOLUTIONS


Expect... **AVR**

TECHNICAL SPECIFICATIONS



Body: PP-B

Sealing ring:
NBR/EPDM

Grip ring: POM

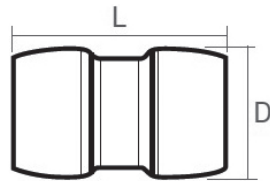

Mounting instruction

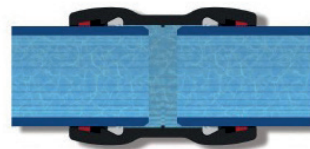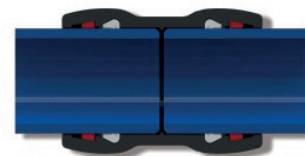

Clean and chamfer the pipe ends, apply a lubricant to the sealing rings. Never on the pipe end.

Insert the pipe up to the stop. If necessary, use the mounting bracket.

The water pressure pushes the pipe back out about 10 mm from the end stop. The tensile connection is now a fact.

Article numbers	PN	Ø	D	L
970208001100020	16	20	37	75
970208001100025	16	25	44	81
970208001100032	16	32	53	92
970208001100040	16	40	65	128
970208001100050	16	50	77	143
970208001100063	16	63	96	180
970208001100075	16	75	112	200
970208001100090	16	90	134	220
970208001100110	16	110	162	240
970208001100125	16	125	179	253
970208001100140	16	140	190	272
970208001100160	16	160	220	298
970208001100180	16	180	240	308
970208001100200	10	200	260	350
970208001100225	10	225	285	380
970208001100250	10	250	314	400
970208001100315	10	315	426	573

Mounting bracket



Code 8870	Ø min	Ø max
8870090180	90	180
8870160250	160	315

AVK Nederland BV

Radeweg 12, 8171 MD Vaassen, Postbus 73, 8170 AB Vaassen
 Telefoon +31 (0)578-574490
 E-mail: info@avknederland.nl
 Internet: www.avknederland.nl

Expect... **AVR**