



AVK DISMANTLING JOINT (RO)

712/2810-001

PN 10/16



AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.



Product description:

Dismantling joint, type RO according to EN 545. For water, wastewater and neutral liquids to max. 70°C


Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16



Characteristics:

- Ductile iron according to EN545
- Cast iron fitting GJS-400-15 (GGG-40)
- Fusion bonded epoxy coating in compliance with DIN 3476 part 1 and EN 14901, GSK guidelines internally and externally
- Available in DN80 – DN1200
- Kiwa product certificate K25396/02 (Kiwa guideline BRL-K772)

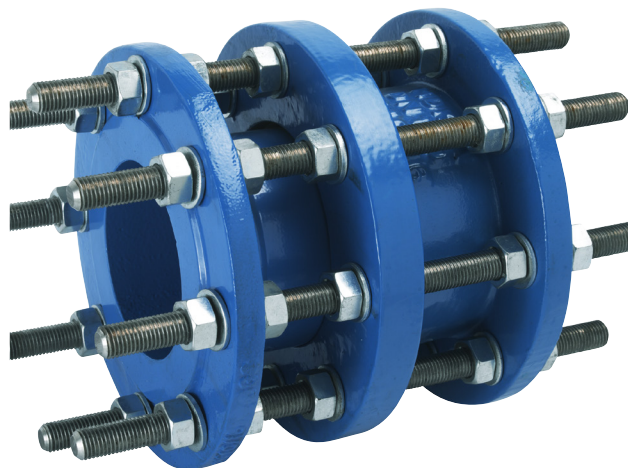


GSK-ID:

kiwa

Expect... **AVR**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product programme.

COPYRIGHT©AVK GROUP 2021

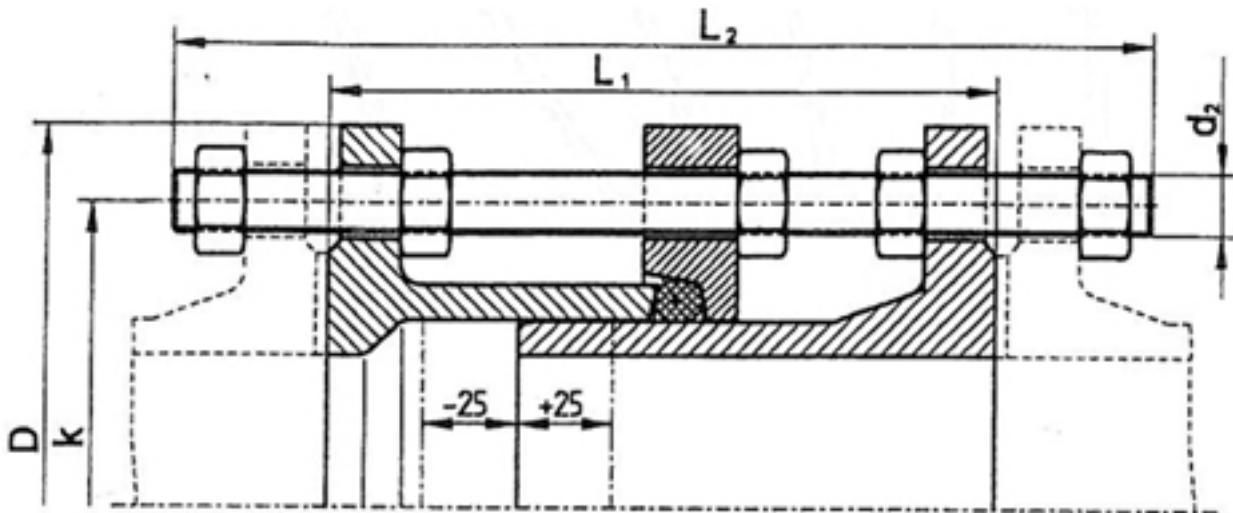

Component list:

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	L1 mm	L2 mm	Theoretical weight/kg
712-0050-28101	50	180	280	11
712-0065-28101	65	180	280	13
712-0080-28101	80	200	310	17
712-0100-28101	100	200	310	20
712-0125-28101	125	200	310	26
712-0150-28101	150	200	320	32
712-0200-28100	200	220	320	44
712-0250-28100	250	220	340	60
712-0300-28100	300	220	360	94
712-0350-28100	350	230	360	97
712-0400-28100	400	230	370	165
712-0500-28100	500	260	390	181
712-0600-28100	600	260	410	205

Other sizes on request.