



AVK ECCENTRIC FLANGED REDUCER (FFRe)

712/27-001

PN 10/16



AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.



Product description:

Eccentric flanged reducer, type FFRe according to EN 545. For water, wastewater and neutral liquids to max. 70°C



Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Characteristics:

- Ductile iron according to EN545
- Cast iron fitting GJS-400-15 (GGG-40)
- Fusion bonded epoxy coating in compliance with DIN 3476 part 1 and EN 14901, GSK guidelines internally and externally
- Available in DN80 – DN1200
- Kiwa product certificate K25396/02 (Kiwa guideline BRL-K772)




GSK-ID:

kiwa

Expect... **AVR**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product programme.

COPYRIGHT©AVK GROUP 2021

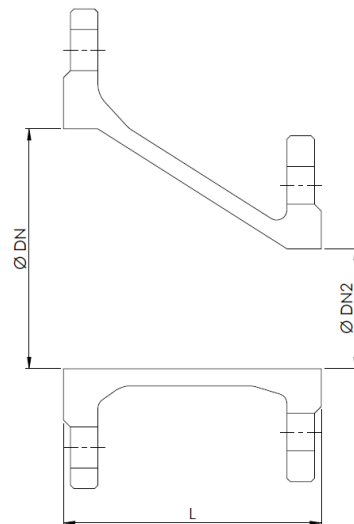

Component list:

| | |
|------------|--------------|
| 1. Fitting | Ductile iron |
|------------|--------------|

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

| AVK ref. no. | DN mm | DN2 mm | Flensboring | L mm | Theoretical weight/kg |
|--------------|----------|-----------|-------------|---------|--------------------------|
| 712-0101-271 | 100 | 80 | PN10/16 | 200 | 10 |
| 712-0152-271 | 150 | 100 | PN10/16 | 200 | 13 |
| 712-0201-271 | 200 | 150 | PN10 | 300 | 22 |
| 712-0251-271 | 250 | 200 | PN10 | 300 | 31 |

Other sizes on request.