



AVK RADIAL TEE (SCH)

712/14-001

PN 10/16



AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.



Product description:

Radial tee, type SCH according to EN 545. For water, wastewater and neutral liquids to max. 70°C

Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16



Characteristics:

- Ductile iron according to EN545
- Cast iron fitting GJS-400-15 (GGG-40)
- Fusion bonded epoxy coating in compliance with DIN 3476 part 1 and EN 14901, GSK guidelines internally and externally
- Available in DN80 – DN1200
- Kiwa product certificate K25396/02 (Kiwa guideline BRL-K772)




GSK-ID:

kiwa

Expect... **AVR**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product programme.

COPYRIGHT©AVK GROUP 2021

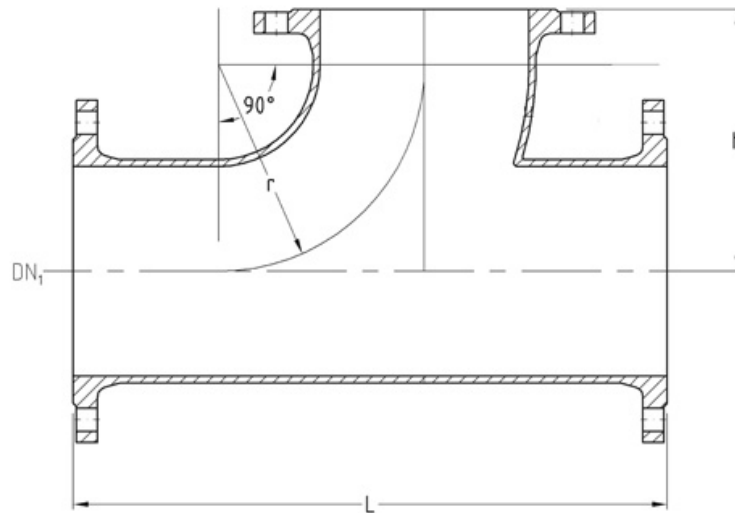

Component list:

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN1 mm	DN2 mm	L mm	H mm	Theoretical weight/kg
712-0080-14101	80	80	360	180	16
712-0100-14101	100	100	400	200	20
712-0125-14101	125	125	450	225	28
712-0150-14101	150	150	500	250	39
712-0200-14100	200	200	600	300	54
712-0250-14100	250	250	700	350	84
712-0300-14100	300	300	800	400	114
712-0400-14100	400	400	1000	500	180
712-0500-14100	500	500	1400	800	390
712-0600-14100	600	600	1600	900	560